


Description	TORX FLAT HD. UNDER CUT W/5 NIBS 3 THRD CUTTING END HI/LO CONCRETE SCREWS	Drawing NO.	
品名	水泥螺絲梅花孔 T30 平頭平切 5 痕雙牙尾端高低牙滾線 35 度尾	客 戶	

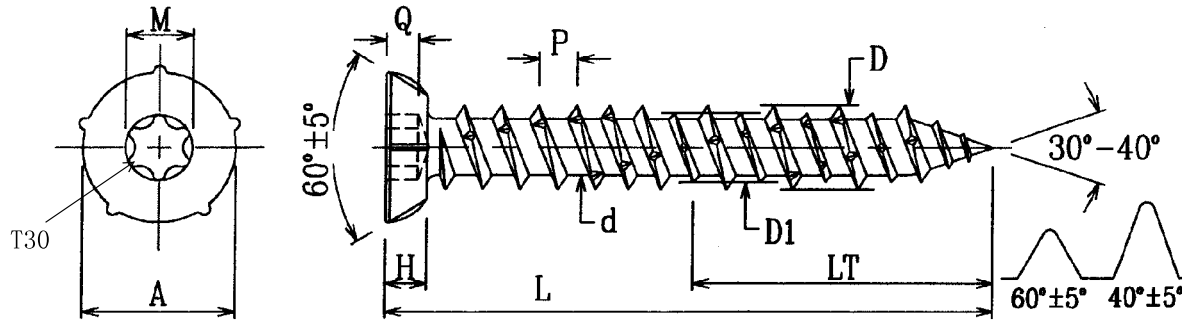

Notes:

1. Materials(材質): C 1022
2. Case Hardness(表面硬度): 500 HV 0.3
3. Core Hardness(心部硬度): 240~450 HV 0.3
4. Case depth(滲碳深度): 0.15 mm Min
5. Torsion(扭力強度): 164 kg-cm (16.1 Nm) Min

公稱	Size	A	H	Q	M	D	D1	d	P						
7.5 - 10	Max	11.80	3.40	-	≡	7.70	Ref.	5.40	Ref.						
	Min	10.80	2.80	2.30	5.80	7.30	6.20	5.00	2.60						
Nominal length	L	72 mm	92 mm	112 mm	132 mm	152 mm	182 mm	202 mm	212 mm						
	Max	74.00	94.00	114.50	134.50	154.50	184.50	204.50	214.50						
	Min	70.00	90.00	109.50	129.50	149.50	179.50	199.50	209.50						
Thread length	Max	33.0	33.0	33.0	33.0	33.0	33.0	33.0	33.0						
	LT	Min	25.0	25.0	25.0	25.0	25.0	25.0	25.0						

Nominal length L : up to 100 mm incl. + / - 2.00 mm
 Over 100 mm + / - 2.50 mm

Remark (修改說明):

1. 增加長度公差。

名称: 内六角花形水泥螺钉

规格: 7.5*L

材质: 1022

表面硬度: 500HV min

芯部硬度: 240-450HV

表面处理: 镀锌

备注: 表面去毛刺、无划伤、无压印

